

The image features a central grey diamond shape containing the word "ALCOMET" in white, bold, sans-serif capital letters. The diamond is set against a background of industrial scenes, including a blue machine with "MINO." on it, a large circular gear-like structure, and a conveyor belt with metal sheets. The background is divided into blue and grey geometric sections.

ALCOMET

ALCOMET

Our Values



Loyalty

Being a reliable partner to the customers who have placed their trust in us, offering them the best possible service and providing support to their development.

Responsibility

In our attitude towards the local community and the environment, our stakeholders and our partners.

Transparency

In our actions, our business strategy and corporate policy, by meeting the highest standards of honesty and professionalism.

Flexibility

In our ability to adapt to the dynamic market conditions and ever changing needs of our clients.



Company Profile

TURNOVER 2019 185 MLN EUR

Founded in 1981



Total Area 370 000 m²



Employs 1073 people



ALCOMET



Casting

Annual capacity	60 000 tons
Strip thickness	5–10 mm
Strip width max	1800 mm
Coil Id	600 mm
Coil max. OD	2000 mm

Rolling

Annual capacity	54 000 tons
Cold rolled strips, sheets and foils	
Thickness range	0.008–3.0 mm



Food packaging

HOUSEHOLD FOIL

Alloy	8006, 8011A
Thickness	0.008–0.02 mm
Width	280–600 mm

Food packaging


CONTAINER FOIL

Alloy	3003, 8006
-------	------------

Temper	H24, H0
--------	---------

Thickness	0.045–0.190 mm
-----------	----------------

Width	100–1250 mm
-------	-------------

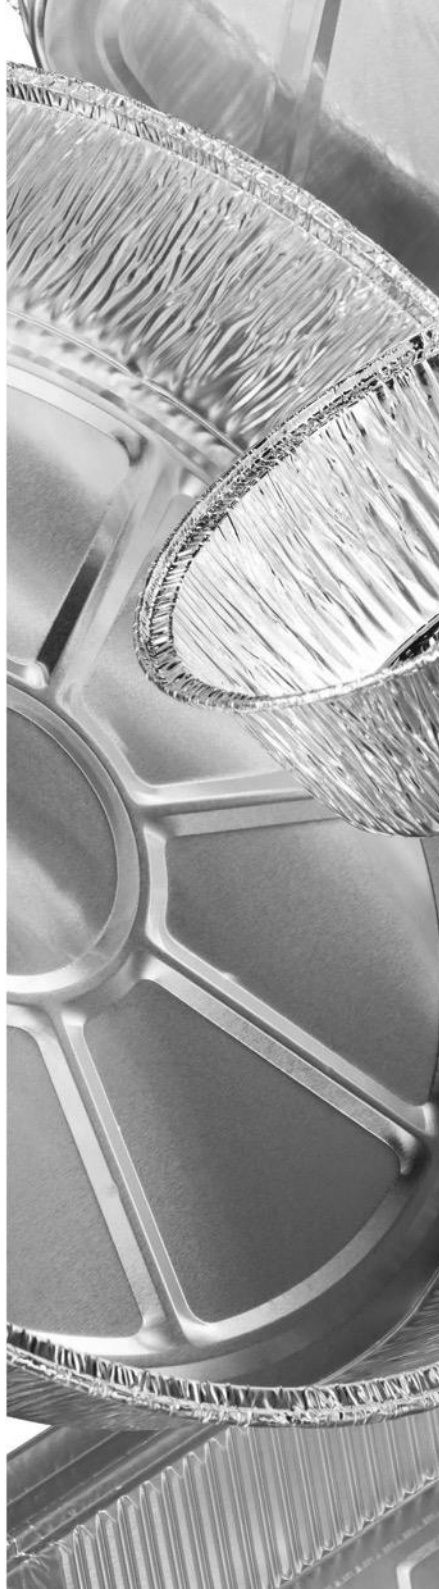

Food packaging


Converter foil

Alloy	1235, 8079
-------	------------

Temper	0
--------	---

Thickness	0.0085–0.04, 0.009–0.04mm
-----------	---------------------------

Width	100–1270 mm
-------	-------------

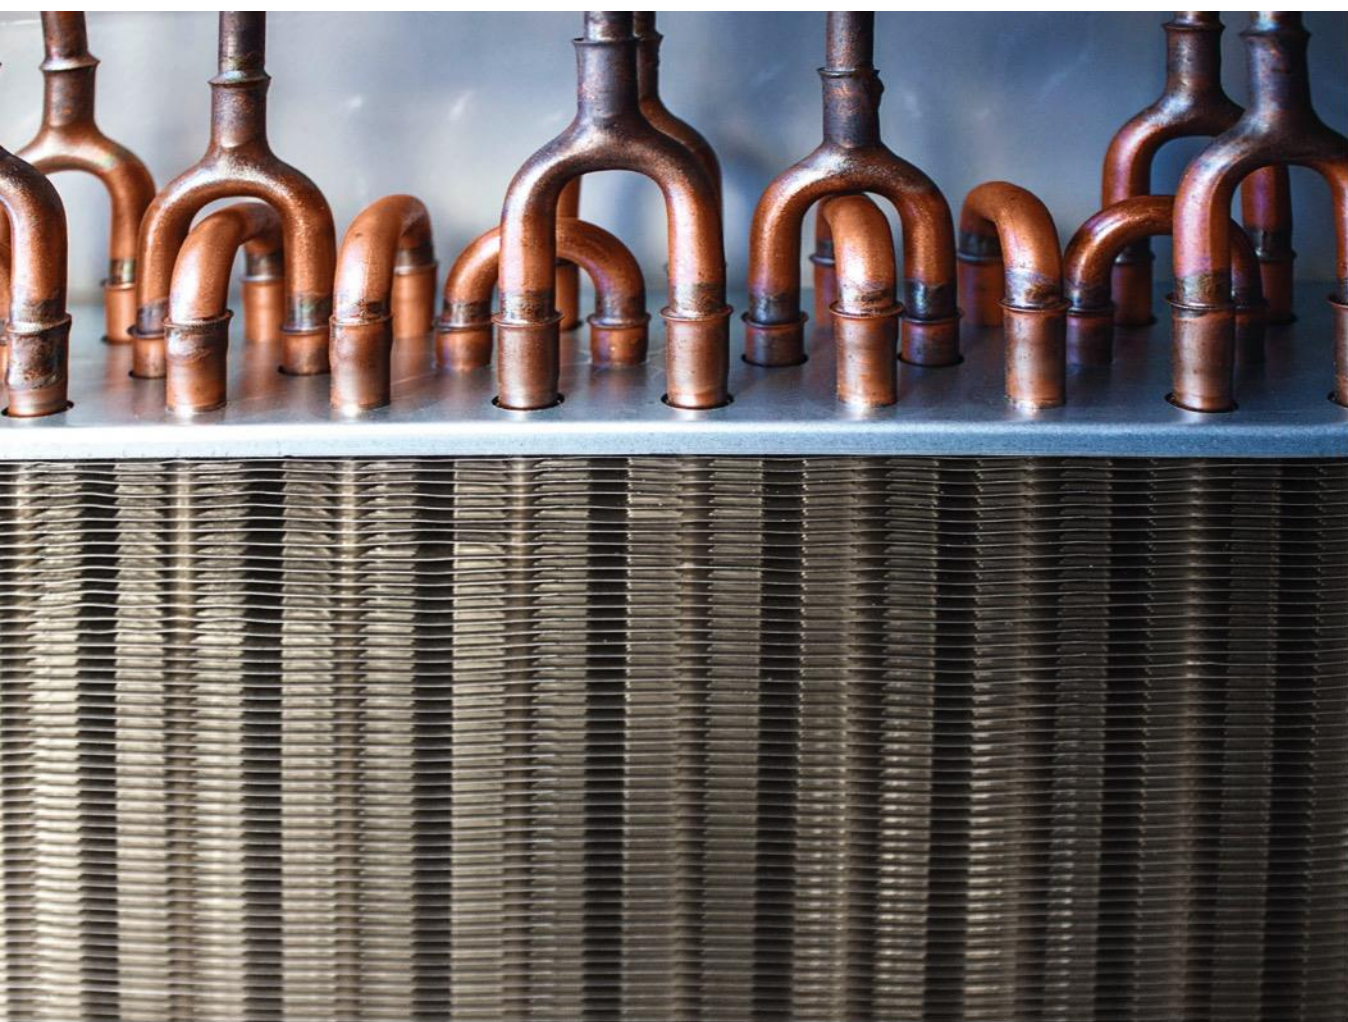

Industrial Applications

STRIPS FOR HEAT EXCHANGERS/FINSTOCK

Alloy	1050A, 8006, 8011A
Temper	0, H18, H22
Thickness	0.060–0.400 mm
Width	200–1280 mm



ALCOMET



Automotive

STRIPS FOR HEAT SHIELDS

Alloy	1050A
Temper	0
Thickness	0.4–1.0 mm

ALCOMET



Building & Construction

TECHNICAL FOIL

Alloy	1050, 8006, 8011A, 8079, 1200
-------	-------------------------------

Temper	0, H18
--------	--------

Thickness	0.012–0.200 mm
-----------	----------------

Width	100–1250 mm
-------	-------------


STRIPS

Alloy	1050A, 3105, 3003
-------	-------------------

Thickness	0.4–0.200 mm
-----------	--------------

Width	250–1500 mm
-------	-------------

ALCOMET

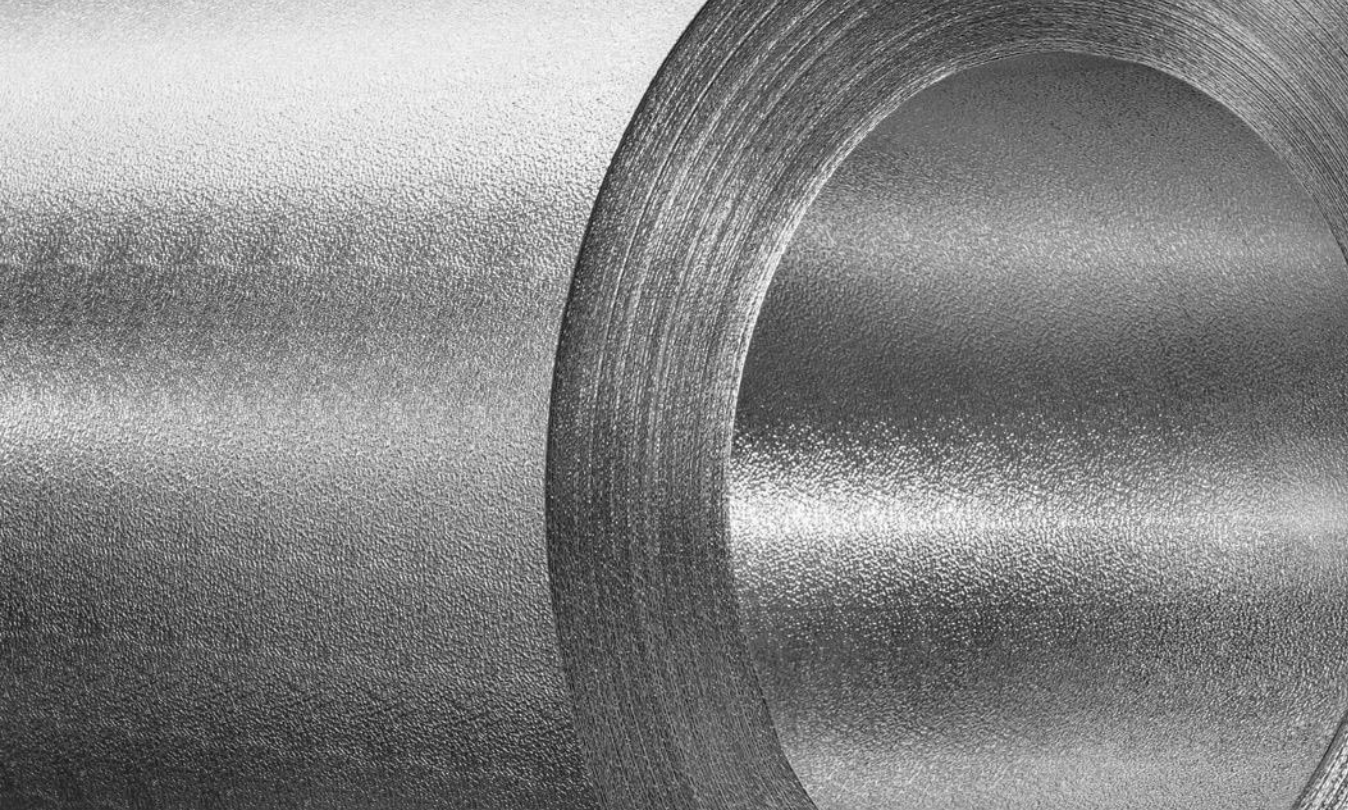

STANDARD STRIPS AND SHEETS

Alloy	1050A, 3105, 3003
--------------	-------------------

Temper	O, H12, H14, H16, H18, H22, H24, H26, H28
---------------	--

Thickness	0.4–3.0 mm
------------------	------------



Billet casting

Diameters	4", 6" and 8" (101.6, 152.4 and 203.2 mm)
-----------	---

Length	6000 mm
--------	---------

Capacity	26000 tons/year
----------	-----------------




Extrusion

Annual capacity	35 000 tons
-----------------	-------------

Profile weight	0.05 to 10 kg/m
----------------	-----------------

5 EXTRUSION PRESSES	2500 tons, 2000 tons, 1800 tons, 1300 tons, 600 tons
------------------------	--



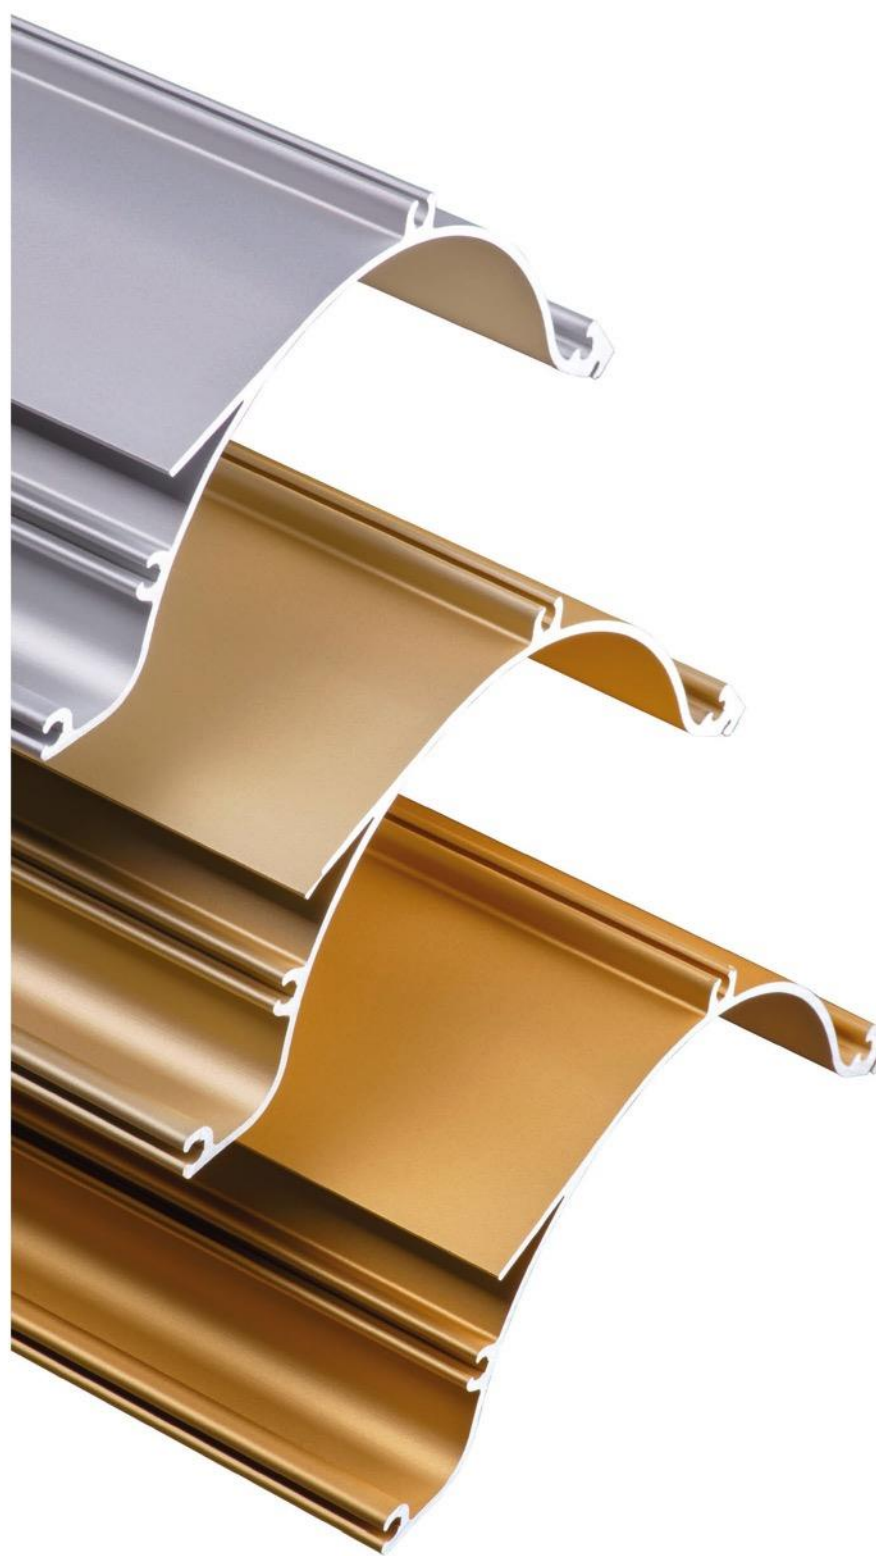

Surface treatment


QUALANOD CERTIFICATE

Max. Length	max. 6500 mm
-------------	--------------


Surface finish	standard brush shot blasted
----------------	-----------------------------------

Anodizing capacity	3000 tons/year
--------------------	----------------

COLOURS

	Natural (C0)		Light bronze (C32)
	Champagne (C2)		Dark Bronze (C33)
	Gold (C3)		Black (C35)
	Sandblasting (E6/C0 SB)		

ALCOMET

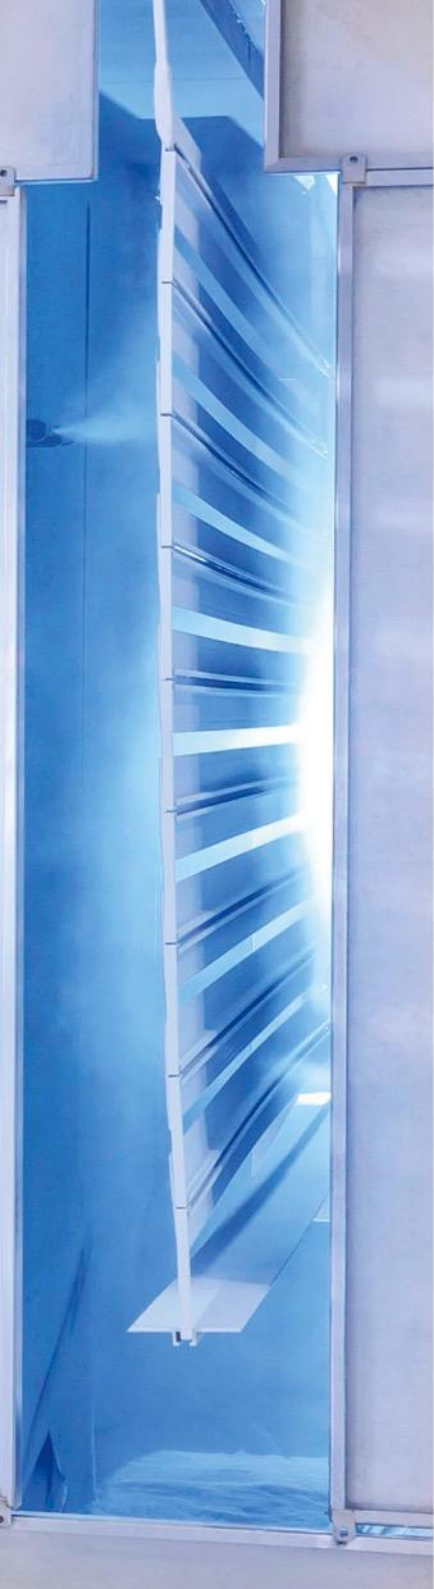

Surface treatment

QUALICOAT CERTIFICATE



Length	max. 6500 mm
--------	--------------

Powder coating Capacity	2500 tons/year
----------------------------	----------------

COLOURS

according to RAL catalogue or
customer specification

ALCOMET

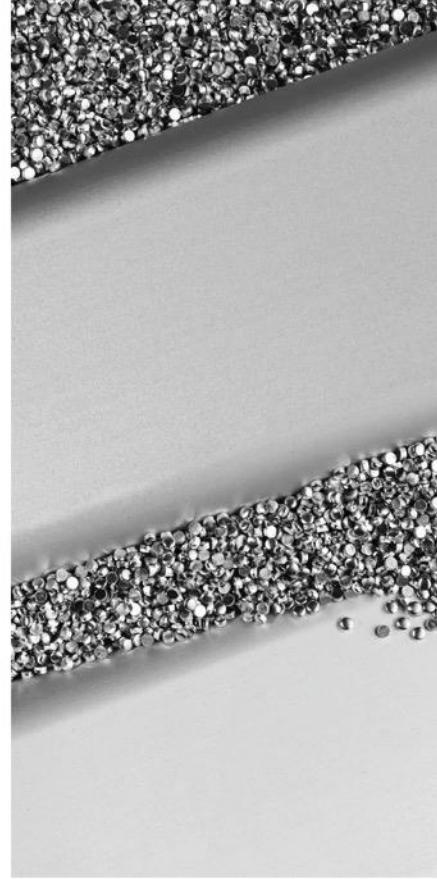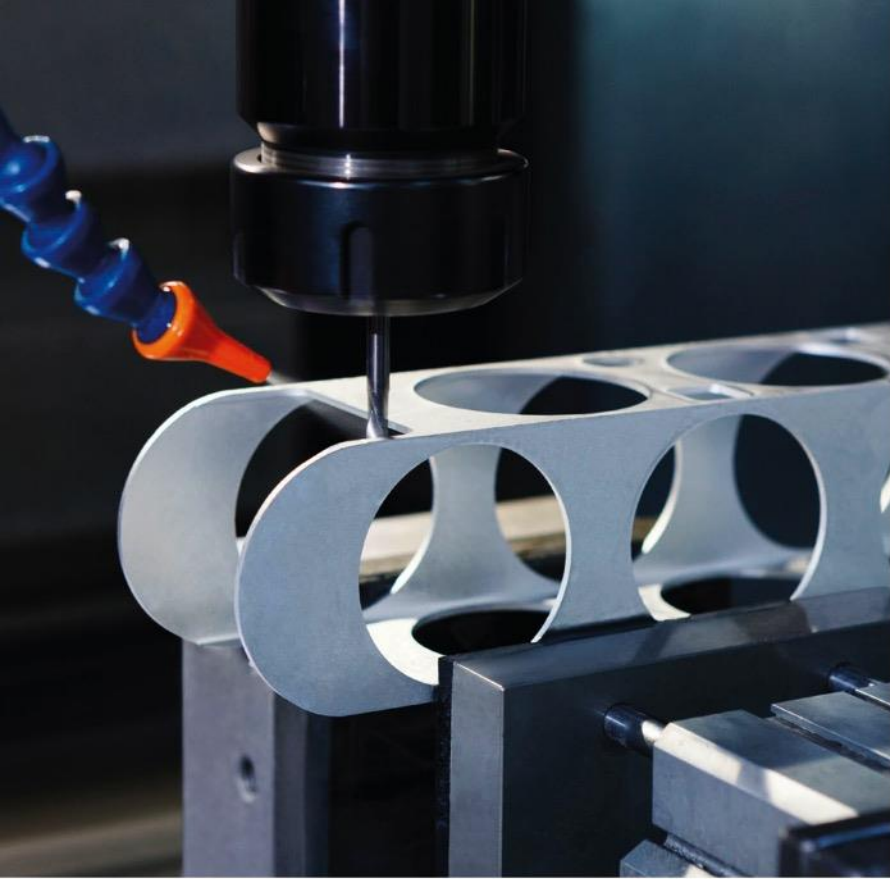


Fabrication possibilities

Precision cutting

Diagonal cutting

CNC-machining

Punching

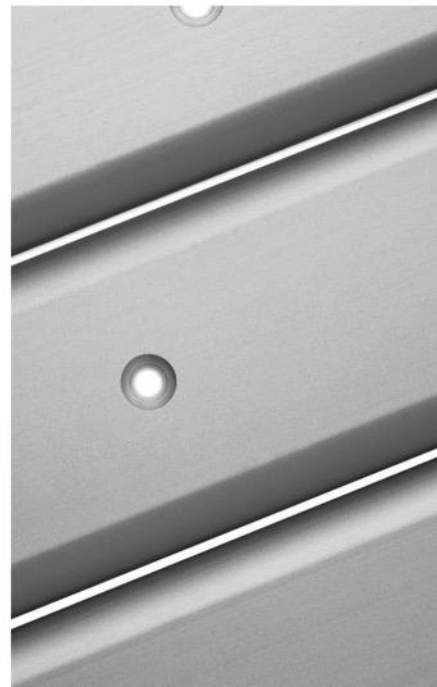


ALCOMET



Wide range
of applications



Continuous improvement

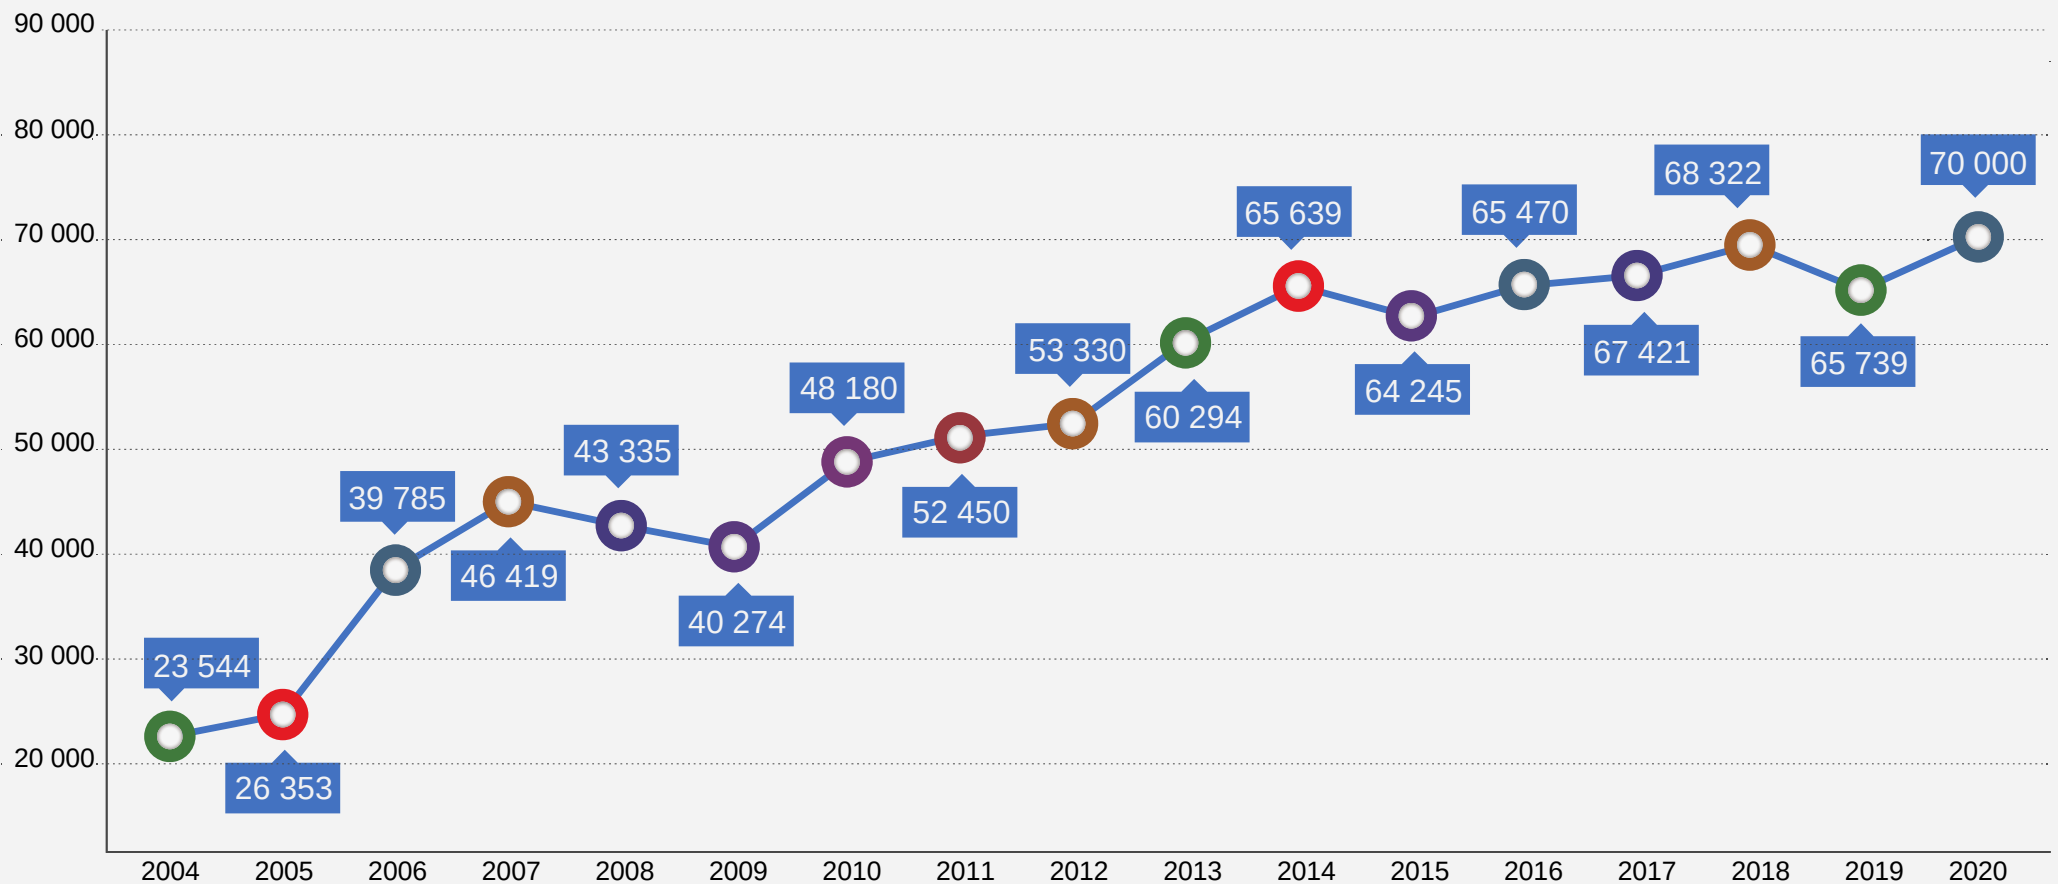

SALES (MT)

ALCOMET


Continuous improvement



TURNOVER ('000 000 EURO)

ALCOMET

Continuous improvement

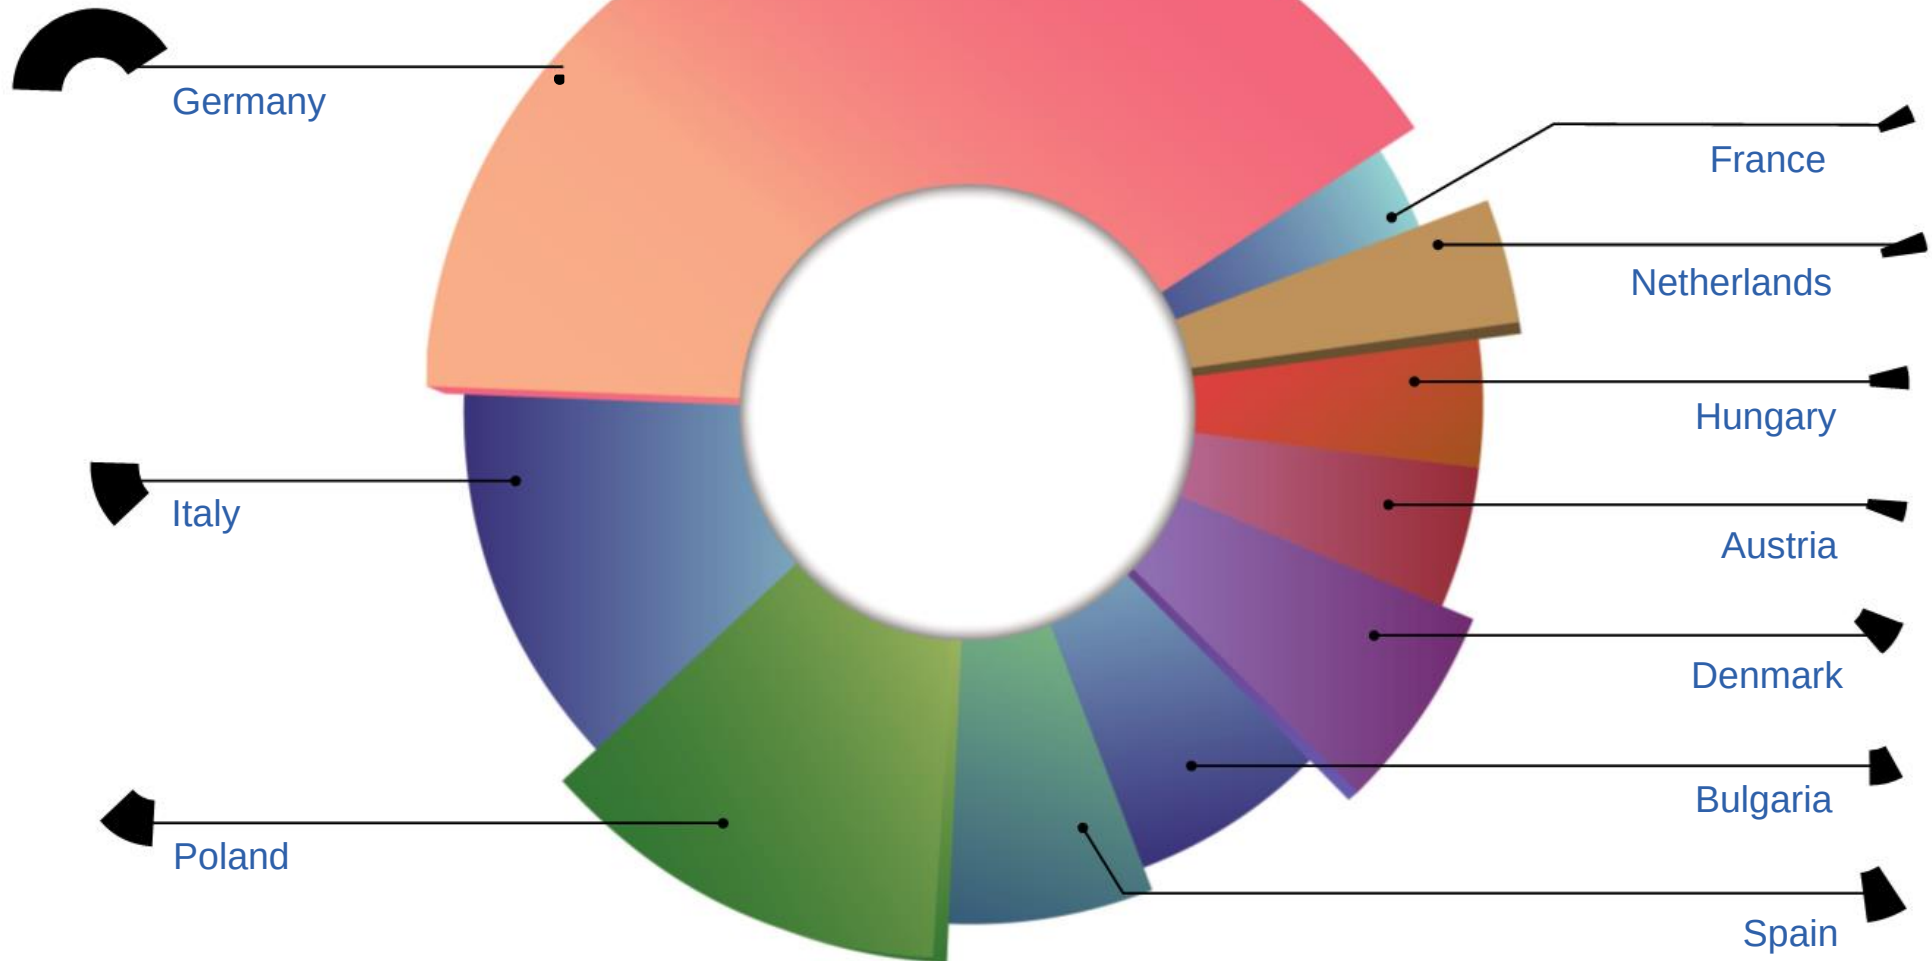

SALES BY COUNTRY 2019

ALCOMET



New production Capabilities till end of 2020

ROLLED PRODUCTS

Rolling width	max. 2.2 meters
---------------	-----------------

New alloys	5000 series
------------	-------------

Rolling capacity	100 000 tons per year
------------------	--------------------------

Thickness range	6 – 0.150 mm
-----------------	--------------

CERTIFICATES

- IATF16949
- QUALANOD
- QUALICOAT
- ISO9001
- ISO14001
- ISO45001
- EN15088



ALCOMET

Thank You!